


T BEND – MANDREL BENDING MACHINES RIGHT/LEFT BENDING WITH CNC-CONTROL



T BEND – MANDREL BENDING MACHINES RIGHT/LEFT BENDING WITH CNC-CONTROL

For better efficiency. The electric axes can be programmed in synchronicity to give optimum cycle times. Tools for bending on multiple levels with automated tool change makes it possible to achieve various radii and the most complex geometries on tubes.

With our clockwise/counterclockwise bending machines – also available with push bending function – the most complex bends become reality with great accuracy.

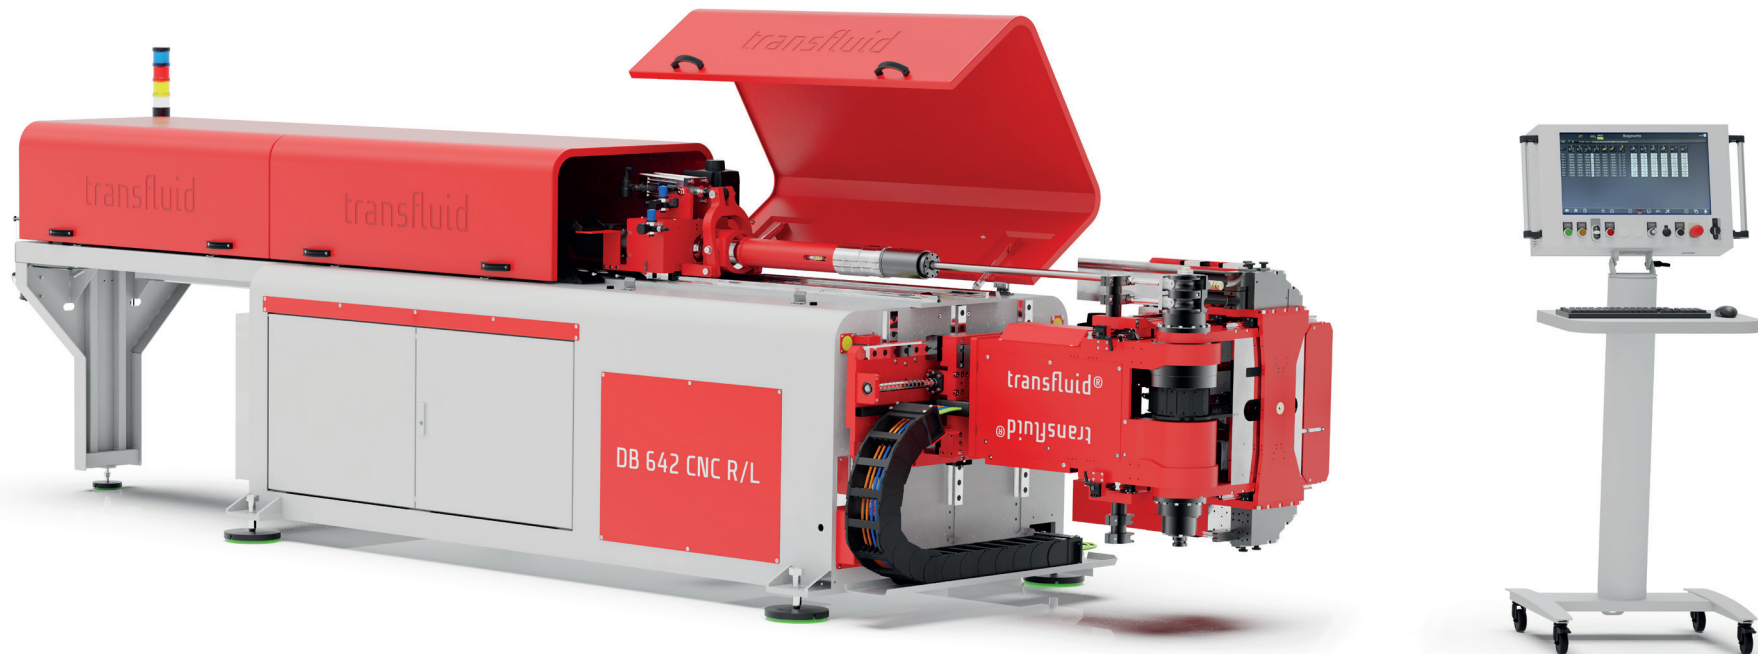




T BEND - MANDREL BENDING MACHINES

FULL ELECTRIC WITH CNC-CONTROL




For better efficiency. The electric axes can be programmed in synchronicity to give optimum cycle times. Tools for bending on multiple levels with automated tool change makes it possible to achieve various radii and the most complex geometries on tubes.

OUR PORTFOLIO OF MACHINES

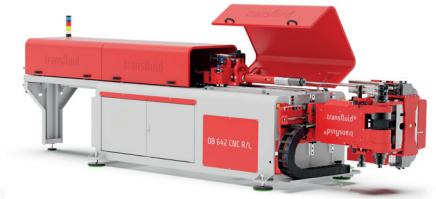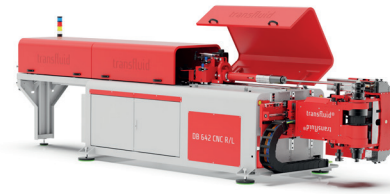


Type	DB 622-CNC-R/L	DB 630-CNC-R/L	DB 642-CNC-R/L	DB 2060-CNC-R/L
Capacity	4-22 mm	4-30 mm	6-42 mm	6-60,3 mm
Max. capacity	7/8" x .072" (mild steel) 7/8" x .049" (stainless steel)	1 1/8" x .072" (mild steel) 1 1/8" x .049" (stainless steel)	1 5/8" x .120" (mild steel) 1 5/8" x .120" (stainless steel)	60,3 x 3,9 mm (mild steel) 60,3 x 2,7 mm (stainless steel)
Max. Radii	2.6"	3.5"	6.6"	180 mm
Usable length	6.5 ft (standard) 10 ft 15 ft mm 20 ft (special)	6.5 ft (standard) 10 ft 15 ft mm 20 ft (special)	6.5 ft 10 ft (standard) 15 ft mm 20 ft (special)	2000 mm 3048 mm (standard) 4572 mm 6096 mm (special)
Speed of bending axis	300 °/sec.	275 °/sec.	180 °/sec.	100 °/sec.
Number of CNC axes	9	9	9	9
Power bending axis	servo-electric	servo-electric	servo-electric	servo-electric
Operating voltage	400 Volt - 60 Hz - 3 Ph. - 16 KW	400 Volt - 60 Hz - 3 Ph. - 16 KW	400 Volt - 60 Hz - 3 Ph. - 16 KW	400 Volt - 60 Hz - 3 Ph. - 30 KW
Voltage of the control	24 Volt DC	24 Volt DC	24 Volt DC	24 Volt DC
Length	185"	232"	232"	8000 mm
Width	63"	65"	65"	1600 mm
Height	57"	57"	59"	1800 mm
Weight approx.	1273 lb	1682"	1682"	9100 kg

BASIC EQUIPMENT:

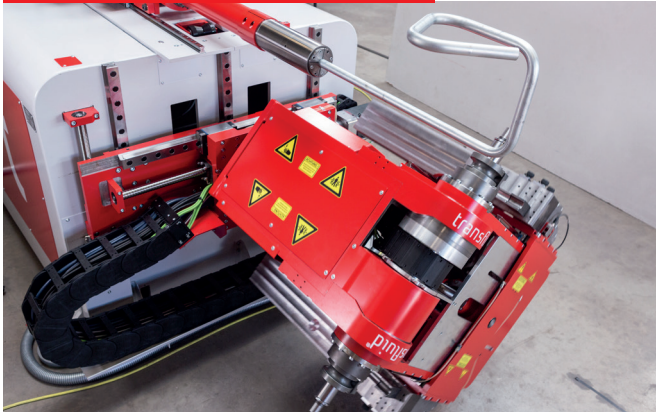

THE 360° BENDING HEAD

The Bending head of our fully electric CNC R/L series can be positioned horizontally and vertically including 360° rotation axis for a change of bending direction (right- or left-hand).

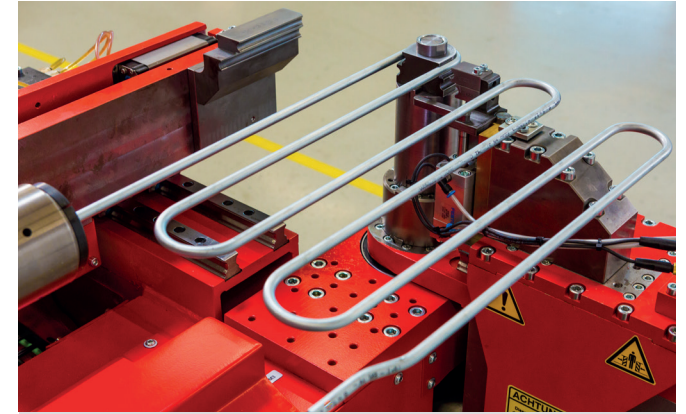

MULTILEVEL BENDING


Each bending head can be equipped with minimum two tool sets, e.g. with different bending radii or form-clamps, max. changing height for standard machine is 60 mm.

Bending tools for tubes with already formed tube ends




FREE BENDING DIRECTION

Positioning of bending head via combined diagonal and rotation axis, this allows bending right- and left-hand in one operation. So the bending direction is freely programmable changing from right hand to left hand for one tube geometry.

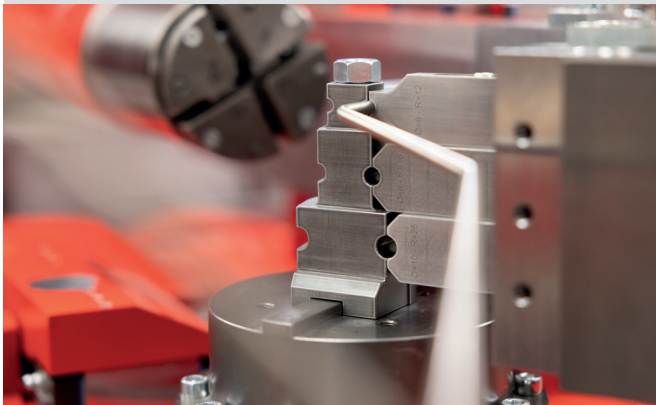

HOLLOW SHAFT

for tooling for small radii.



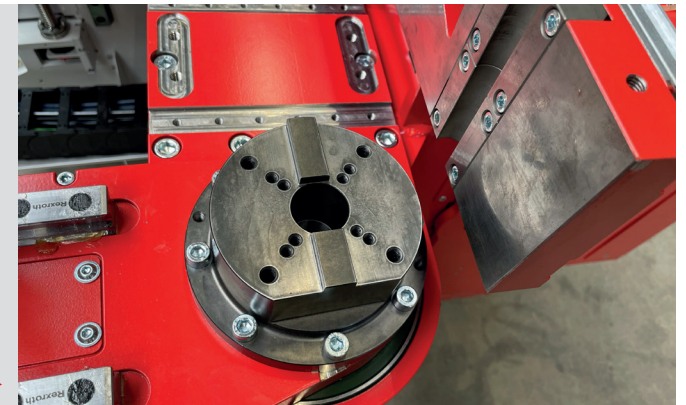




BASIC EQUIPMENT:


BENDING MANDRELS

Bending mandrels in different contours or materials.

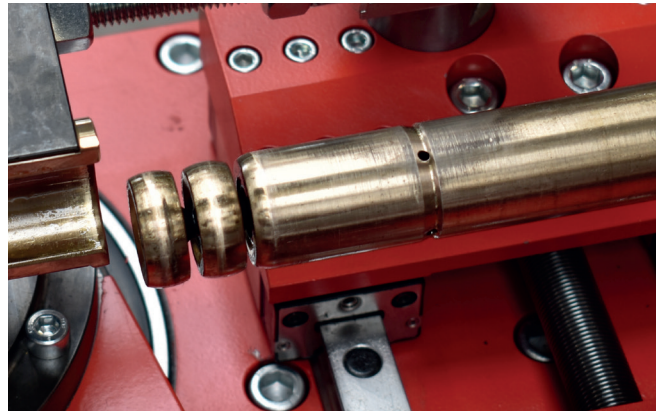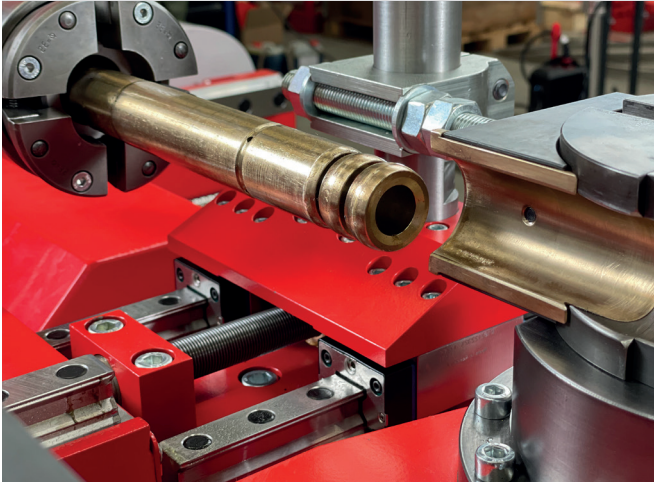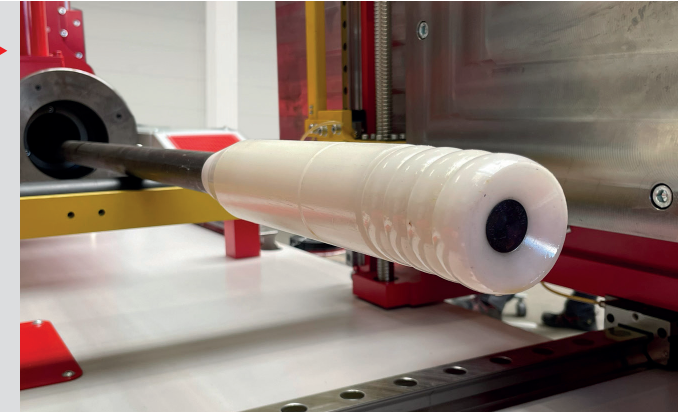


AUTOMATIC MANDREL LUBRICATION

Minimum quantity lubrication for automatic mandrel lubrication, adjustable lubricant quantity, can be used with inside diameters as small as 0.53".

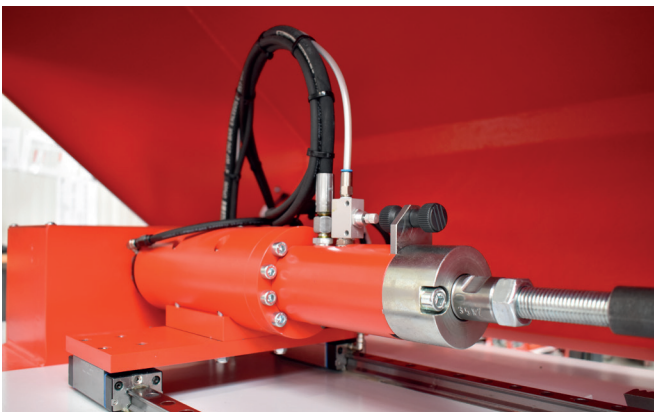


MANDREL WITHDRAWAL

Automatic, programmable mandrel withdrawal.

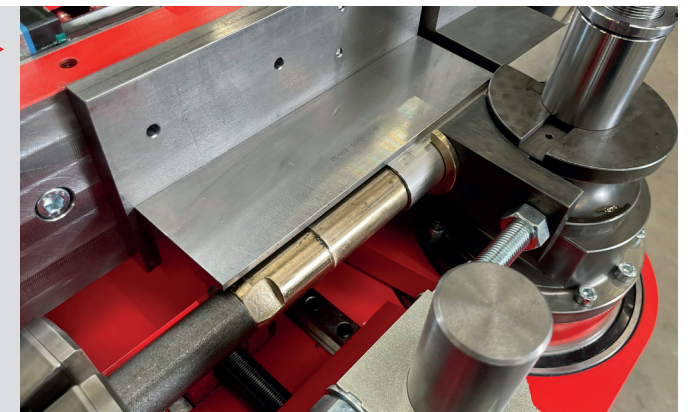



BASIC EQUIPMENT:

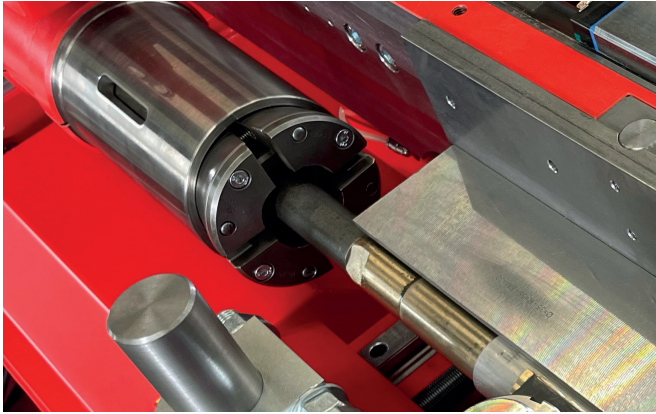

CLAMPING


Material clamping in the VWE is pneumatic

Depending on the contour of the clamping segments, already formed tube ends can be clamped.

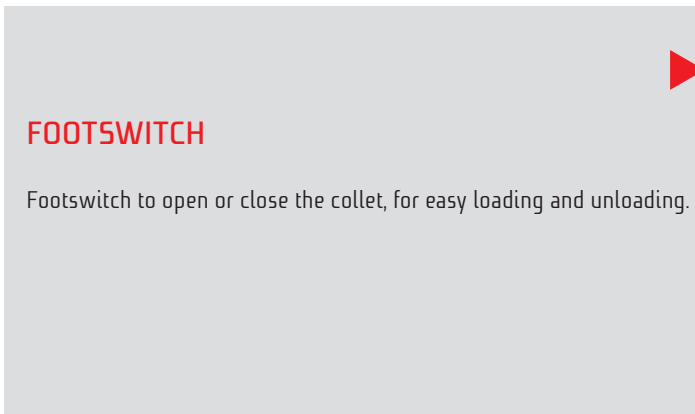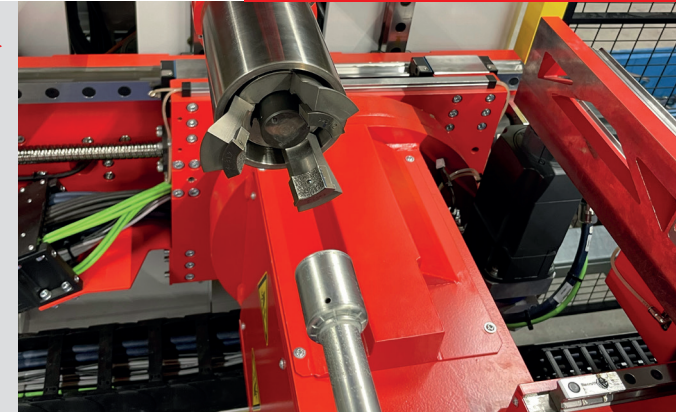


FOOTSWITCH

Footswitch to open or close the collet, for easy loading and unloading.

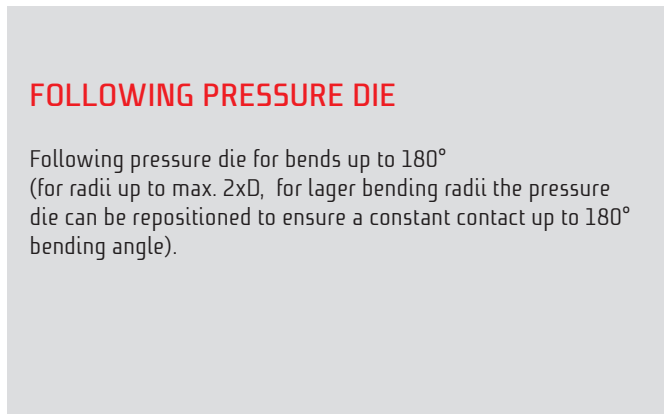


FOLLOWING PRESSURE DIE

Following pressure die for bends up to 180° (for radii up to max. 2xD, for larger bending radii the pressure die can be repositioned to ensure a constant contact up to 180° bending angle).

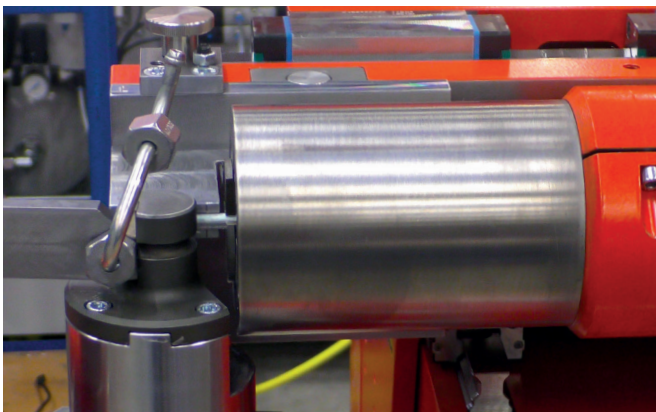

PRESSURE DIE

The wide-opening pressure die allows the collet to move directly behind the bend tool when the tube ends are short.

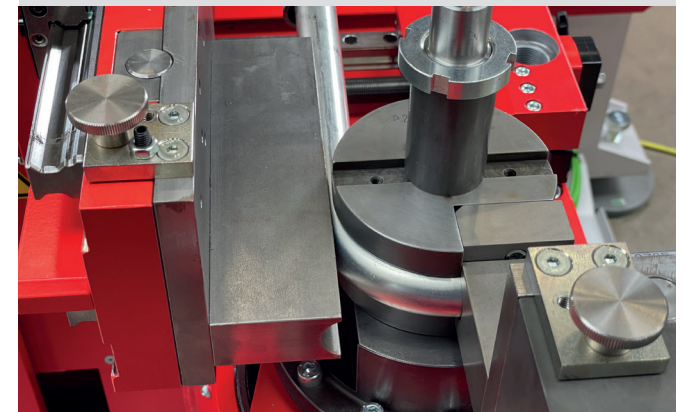

BASIC EQUIPMENT:



POWERFUL CONTROL PANEL

- Touch Panel
- Start of operation via manual switch on the control panel
- In manual mode, all functions can be operated by keyboard and mouse



SOFTWARE


The project allows easy input of bending data and a detailed consideration of collision.

REMOTE DIAGNOSTICS

Allows remote access to control system through the Internet for troubleshooting.

FULLY ELECTRIC

100% electric drive of all 9 axes. Compared to hydraulic machines, energy savings of up to 50% can be achieved.

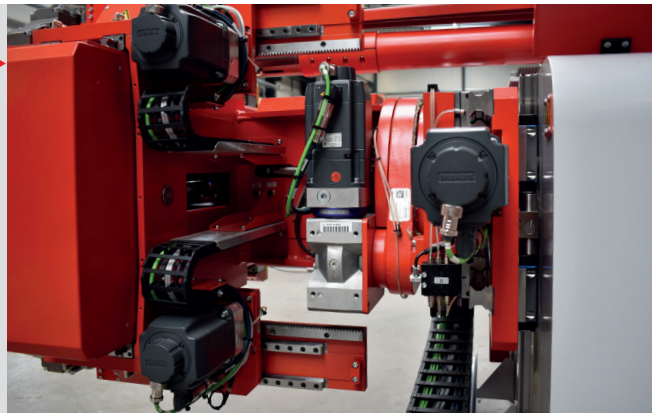


AIR CONDITIONING

Air conditioning for the electrical cabinet.


CONTROL UNIT

The control unit is equipped with high-quality electronic components from leading suppliers. This ensures not only a long service life, but also a reliable supply of spare parts over a long period of time.



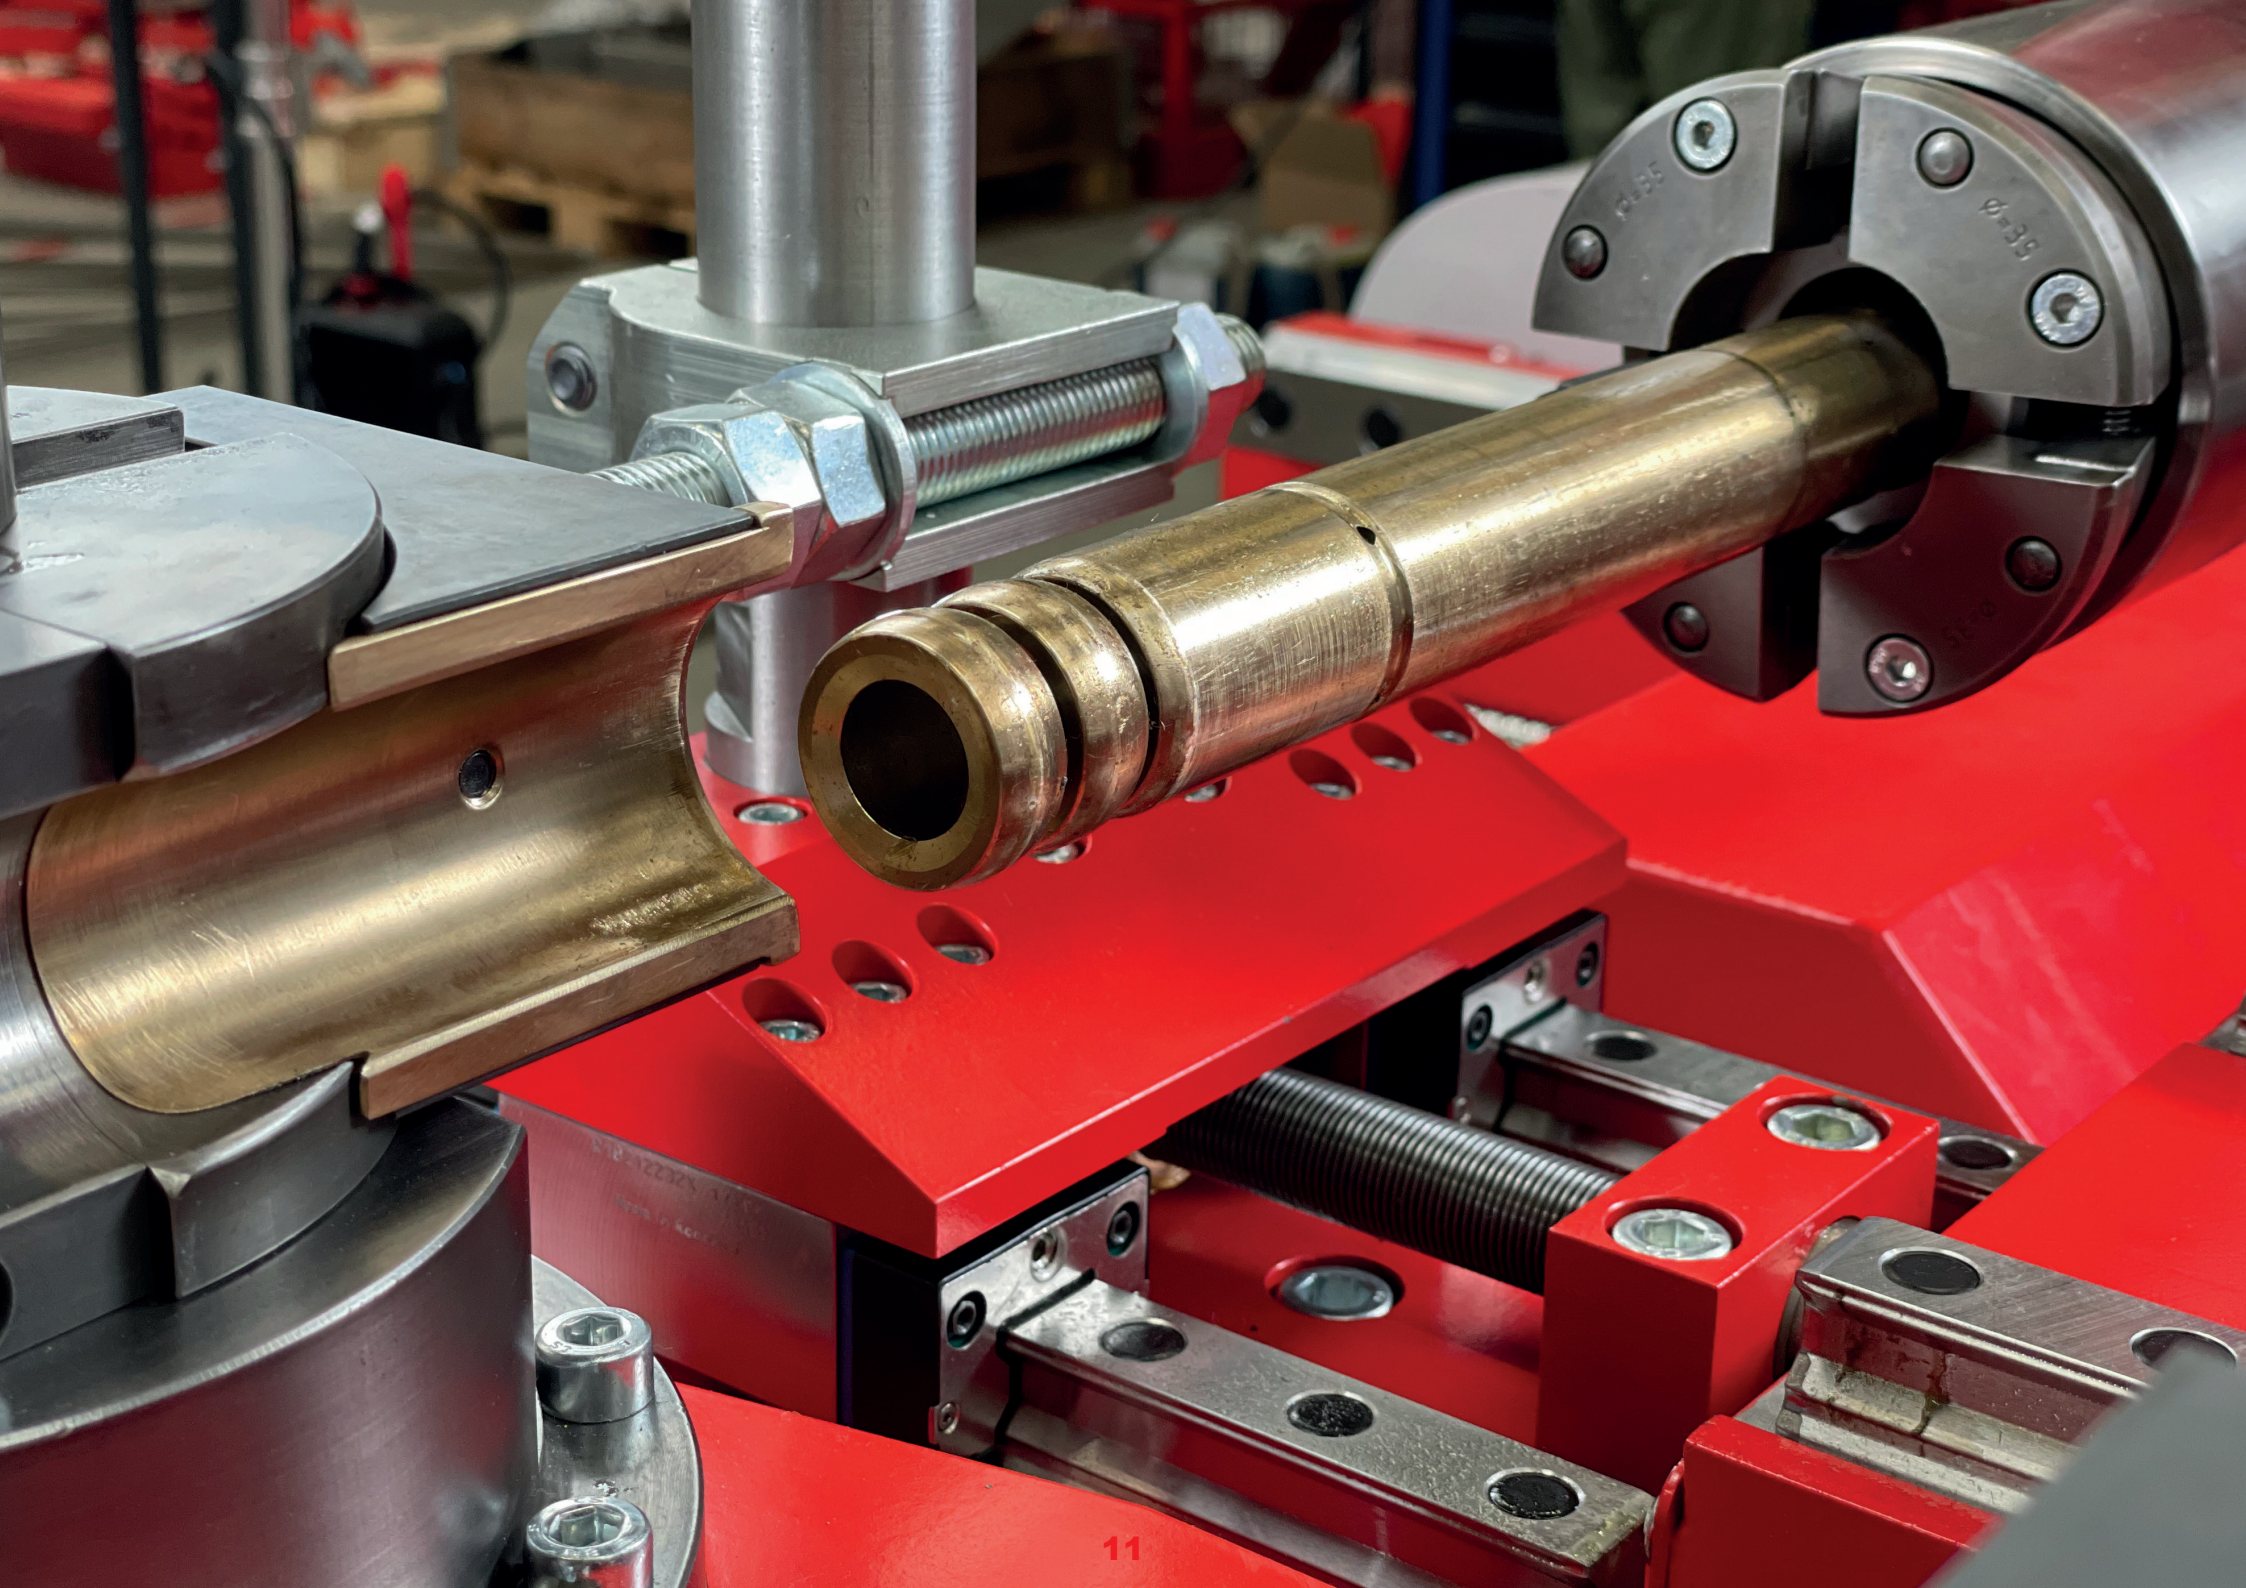

Optional equipment:

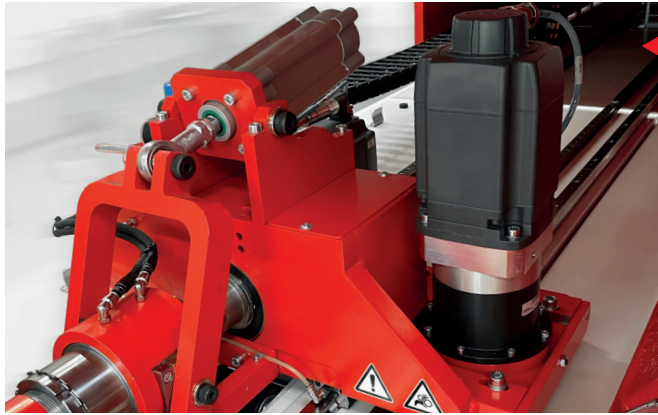


BOOSTING FUNCTION

The collet is equipped with a powerful motor for push bending. Especially when bending thin-walled materials and very small bend radii this feature can improve the bend quality, and the wall thinning can be reduced.

PUSH BENDING

Special tooling is available for push bending large radii.

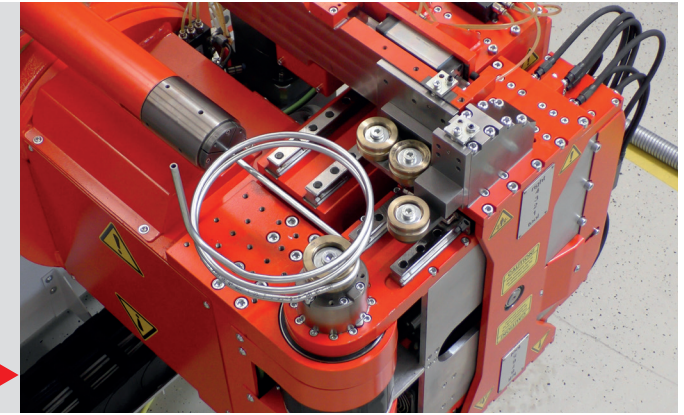


REPEATED GRIPPING

For bending tubes exceeding the max. usable length of the machine and bent without mandrel



Bending with a mandrel is possible up to the maximum useable length of the machine plus approx. 1260 mm

Mechanical pneumatic length stop in the front of the VWE

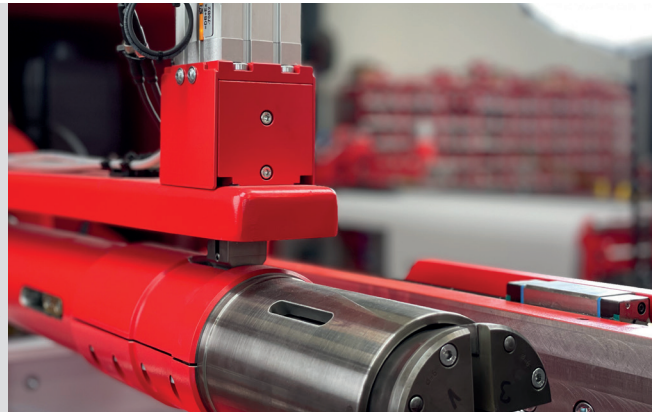

HAND SCANNER

For loading bending programs.

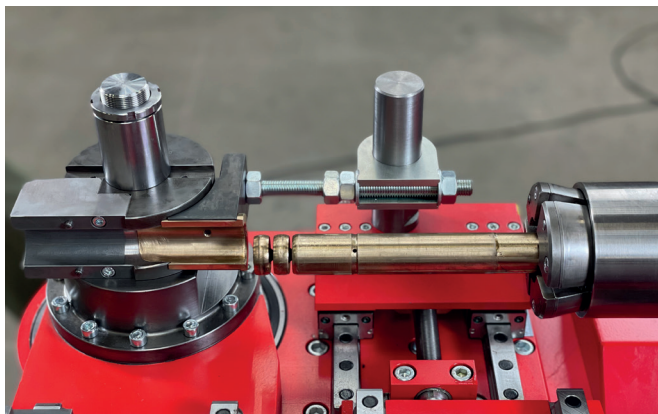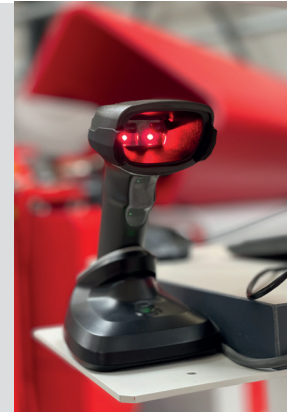

WIPER DIE

Prevents the deformation in the form of wrinkles that occurs when the material exceeds its elastic limit and sets in the curve.

MANDREL SUPPORT

For a correct positioning of the mandrel, the machine is equipped with a mandrel support.




SAFETY COVER

Safety guarding system consisting of an safety cover.
The machine is built according to the latest safety regulations.


SCANNER

Mounted below the bending head for CE-compliant securing of automatic machines.
These are multi-area scanners, which in combination with t-project, can automatically manage up to 8 warning fields and adjust them, depending on the tube length.

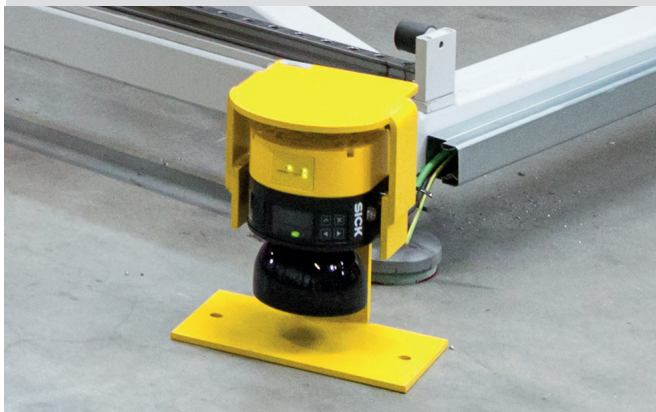

BUSBARS

Adaptation of the bending machine for bending busbars/ conductor rails/ flat conductors.

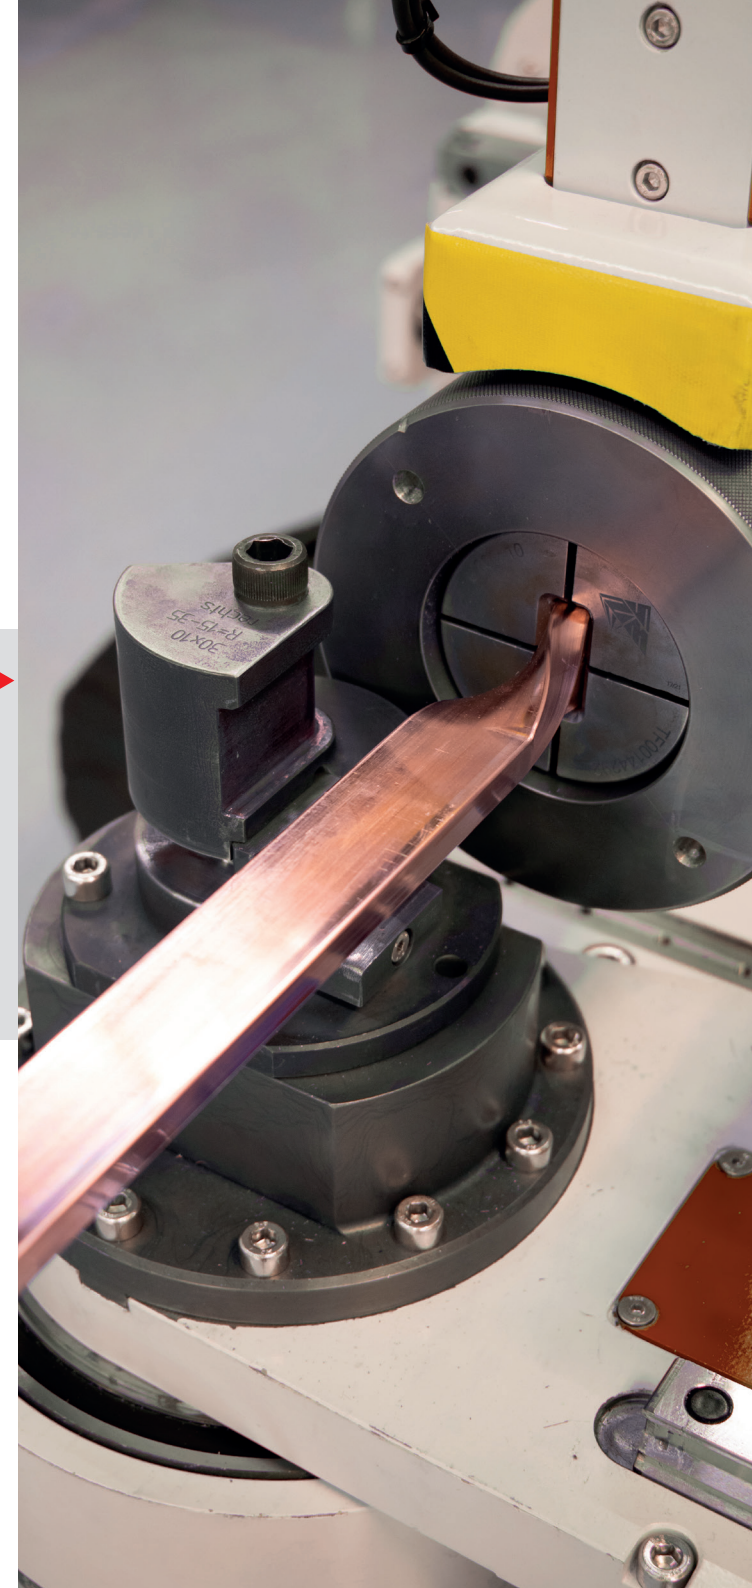

MICRO LUBRICATION UNIT

Central lubrication for automaticall lubrication of all moving parts in the machine.






LOADING & UNLOADING SYSTEMS DESIGNED AND MANUFACTURED BY TRANSFLUID®

We offer a great variety of loading systems for all the machines, depending on the material, tube diameter and tube length. Tubes that have already been formed and have added components can also be loaded without any issues. The appropriate orientation is therefore very important, when loading the tube into the production cell. External workpieces, such as nuts, flanges, supporting sleeves can be added to the system in a controlled manner and included in any subsequent processing steps. A great variety of loading volumes is possible.

The right system for every need


For short tubes there are systems gripping from below with insertion axis, for long tubes, there are systems handling from above. Both options can be used in our combination systems. They guarantee ideal access for the operator, so they can complete the set-up and any maintenance operations in the best possible way.

All these systems are specially designed and produced by transfluid for our bending machines. This ensures optimal integration and functionality.

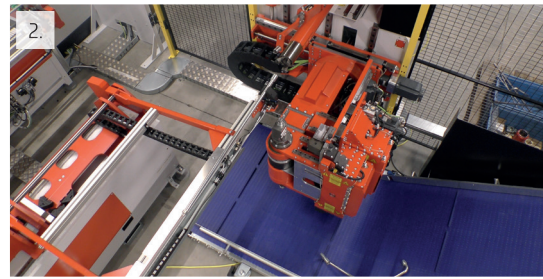






LOADING SYSTEMS:

1. Alignment station
2. Swivel arm feeder
3. Conveyor feeder
4. Chain feeder
5. Loading tables
6. Bowl feeder
7. Step feeder




HANDLING AND GRIPPER SYSTEMS:

8. Outer gripper
9. Handling robots
10. Rotating module
11. Overfloor handling
12. Overfloor handling
13. Underfloor handling
14. Inner and outer gripper

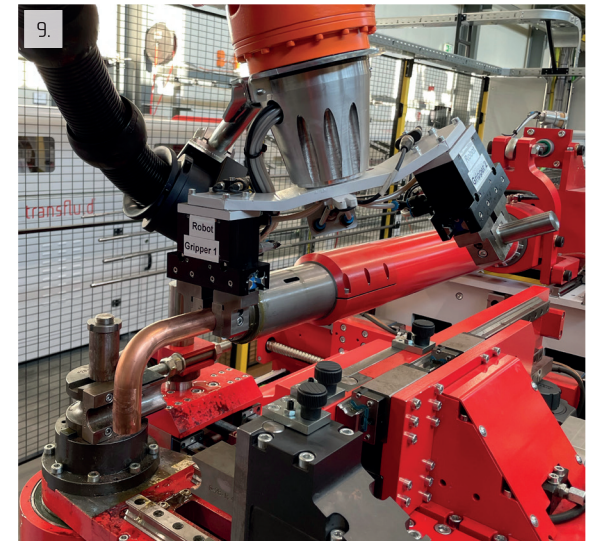



watch the
movie

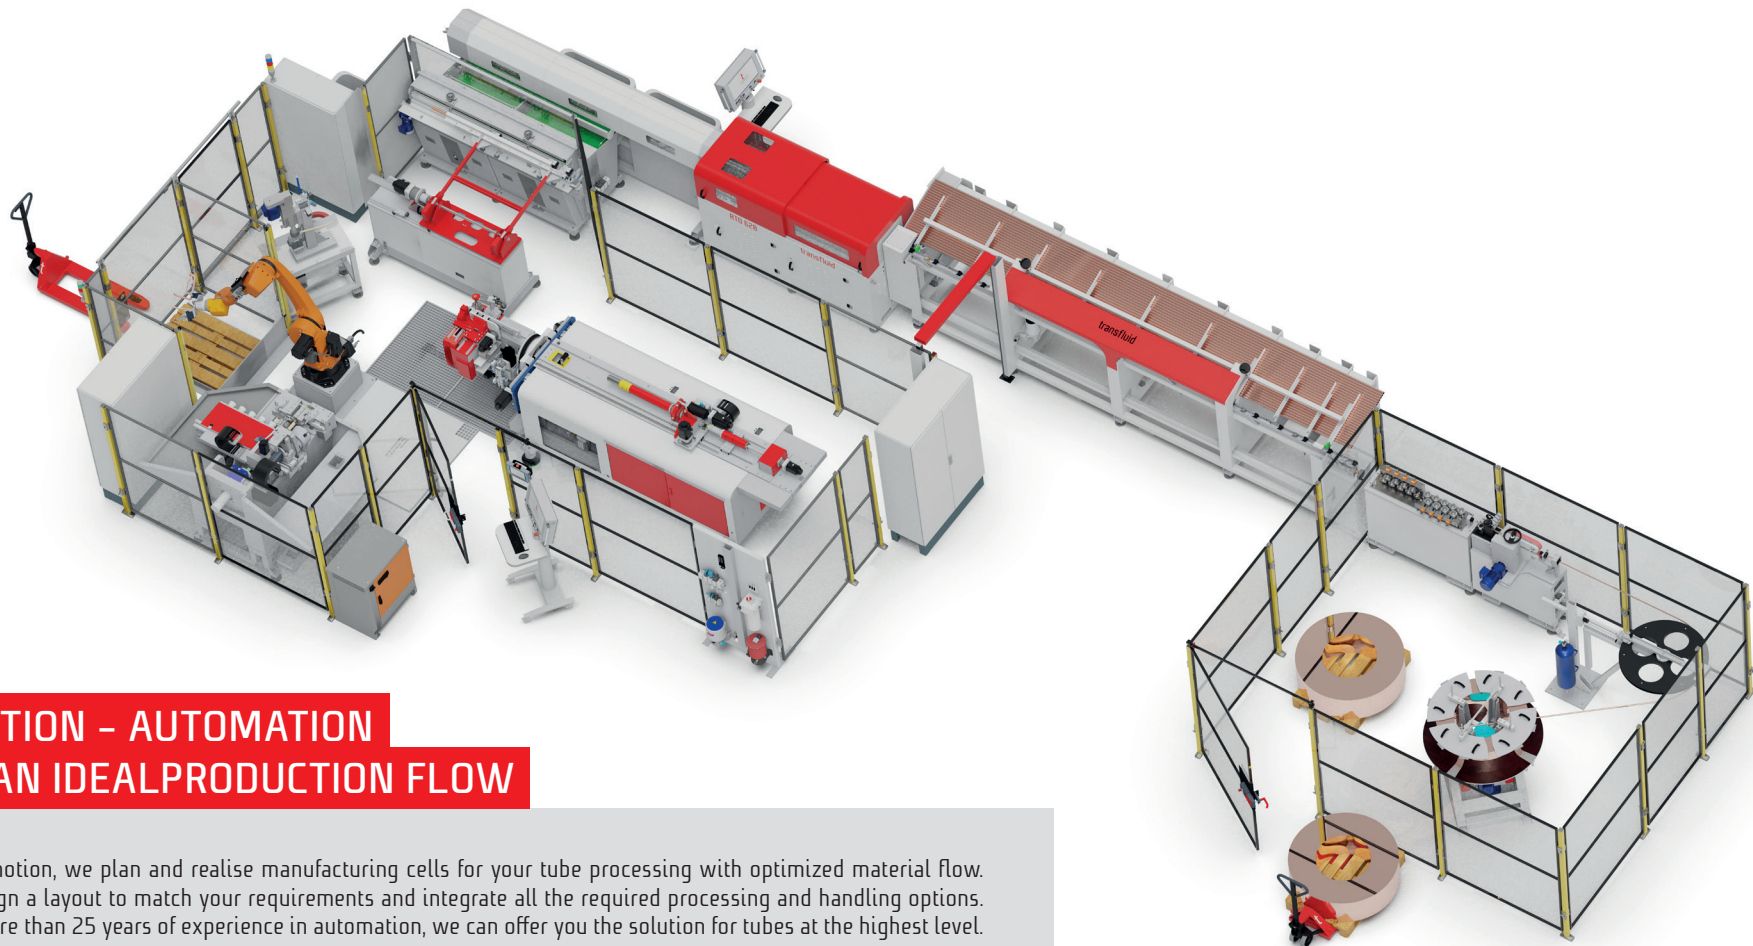

T MOTION - AUTOMATION FOR AN IDEAL PRODUCTION FLOW

With t motion, we plan and realise manufacturing cells for your tube processing with optimized material flow. We design a layout to match your requirements and integrate all the required processing and handling options. With more than 25 years of experience in automation, we can offer you the solution for tubes at the highest level.

On request, we can product marking, as well as optical, contactless camera control systems for comprehensive control of geometries or surfaces. The option to punch holes can also be integrated, as well as transfer lines to achieve the shortest possible cycle times, or systems for loading and controlled unloading, for you very own customised automation solution.

Plug in and Produce - With t motion, you are production-ready from the start and flexible in batch production, without any delays.

Customizable - Further process steps, like loading and unloading systems or additional tube processing tasks can be integrated without any problems.

Industry 4.0 - Interfaces with data caption systems for consumption and operation enable the digitalization and evaluation of the data.

Fast and accurate - The high degree of automation means fast cycle times and therefore efficient manufacturing.



Automotiv




Furniture



HVAC



Hydraulic

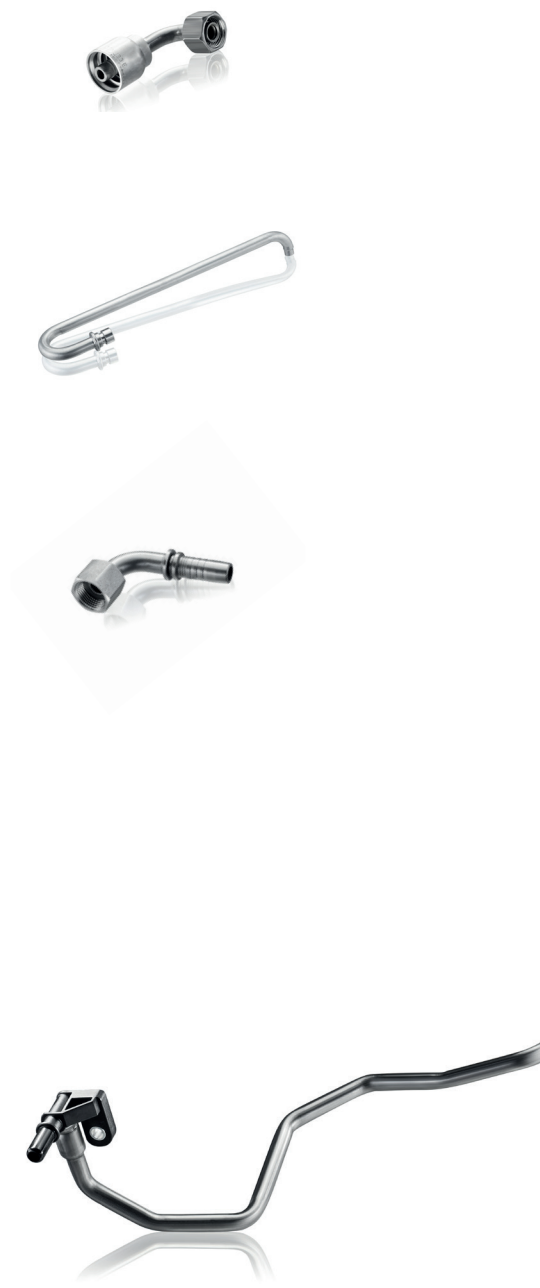



T PROJECT - SOFTWARE: VIRTUAL SUPPORT FOR HIGHER EFFICIENCY

Fewer steps to the finished workpiece: With t project you can see all the variables of the bending process before starting the production. Even complex bending geometries can be planned and executed in a material-adapted and collision-free manner. The virtual bending simulation determines exact bending times and cutting lengths and checks tube geometries for feasibility in advance.

Tube data and bending results are documented with accuracy and they can then be replicated 100%. The common interfaces are available for the import and export of data and connection to PDA or ERP over the network.

Our solution for your individual requirements

We have developed four versions of our t project software, which can be used as single or as networked versions. t project can be integrated centrally in the company's internal security system for optimum data security. Customer-specific modifications, expansions or interfaces are readily possible.

t project Basic

Input and calculation of tube processes

- Direct conversion of isometrics into bending data
- Automatically calculates correction values and over-bending parameters
- The dimension of the room's diagonal allows the operator to easily and manually control the bent workpiece
- The software can interface with measuring devices and CAD and Office programs. Supported file formats include IGES, STEP, IT and PCF.



t project Professional

Input and calculation of tube processes, including collision testing

- Same basic features as t project Basic
- Necessary tube length extensions are detected and added automatically
- Additional production safety: the collision test will determine the feasibility of the tube geometry before the actual bending process, which prevents collisions with the machine itself or its surroundings
- The software will suggest alternative options in case of predicted collisions
- The software will take all the measurements for the collision test from the CAD model of the bending machine
- Surrounding features in the room can also be included in the collision test (pillars, shelves, floor etc.)
- It is also possible to run simulations with tubes that already have flanges or other forming features.

t project Draft

Tablet version for mobile use

t project PM-N

Project management software



transfluid®
Maschinenbau GmbH

Hünegräben 20-22
D-57392 Schmallenberg
Germany

Tel.: +49 29 72 / 97 15 - 0
Fax.: +49 29 72 / 97 15 - 11

info@transfluid.de
www.transfluid.net